

## **PM-10 POLE MUZZLE INSTALLATION GUIDE**



The information, specifications, and illustrations in this manual are on the basis of information available at the time it was written. The specifications, torque values, pressures of operation, measurements, adjustments, illustrations, and other items can change at any time. These changes can affect the service of the given product.

For the complete and most current information, contact:

Hogg & Davis, Inc  
P.O. Box 405 / 3800 Eagle Loop  
Odell, OR 97044-0405  
541-354-1001  
541-354-1080 Fax  
[www.hoggdavis.com](http://www.hoggdavis.com)

# PM-10 POLE MUZZLE

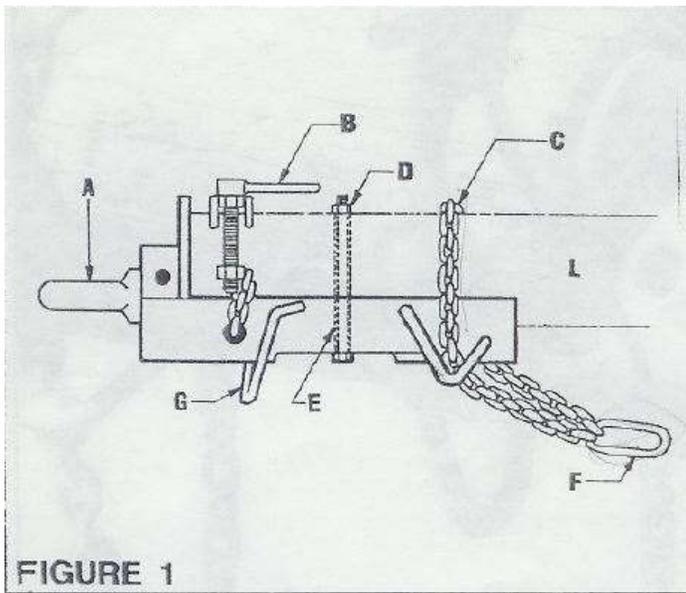


FIGURE 1

In Figure 1, Illustration shows the proper way of installing the Hogg & Davis, Inc. Model PM-10 Pole Muzzle.

After the lead pole is positioned on the trailer, ensure that the cross arm hole (E) is toward the towing hitch and vertically positioned. Hold up the pole muzzle to the underside of the lead pole (L), install snubbing chain assy (B) into muzzle hole and around the pole and tighten. The choker chain (C) should be around the pole top and position ring (F) toward the rear. If a second snubbing chain is required, install it beside the choker chain (C).

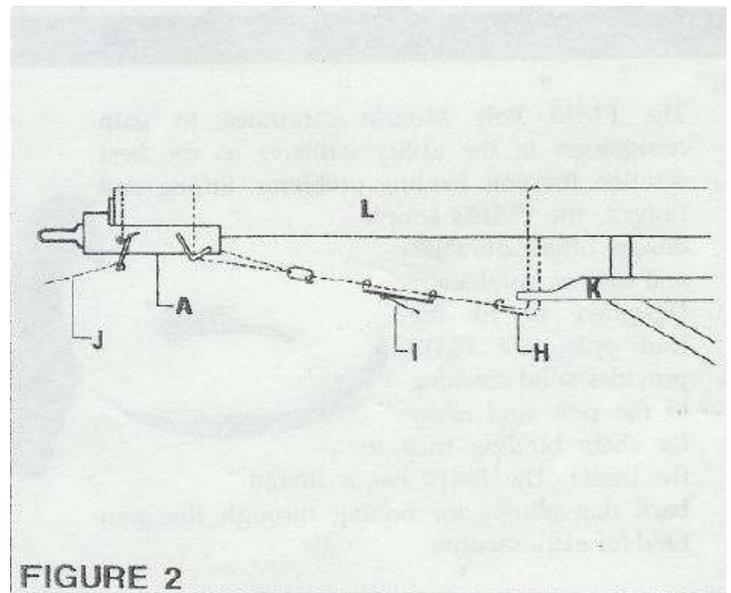


FIGURE 2

In Figure 2, illustration shows how to rig the muzzle and lead pole assembly to the pole trailer. After the lead pole has been secured and bounded on the trailer (K), hook up one end of a chain (H) to the choker ring (F) and other end into the pintle eye of the pole trailer, up and over the pole and down back into the eye and hook back to the chain. Next step is to attach an over-center load binder (I) to the chain (H) and tighten until the lead pole is secured. Hook up towing vehicle and attach safety chains to the pole muzzle (G). Proceed with loading and securing the remaining poles if any.



"Rugged Dependability."

COPYRIGHT 2015 HOGG & DAVIS, INC



# PM-10 POLE MUZZLE



The PM-10 Pole Muzzle Continues to gain recognition in the utility industry as the best solution for pole hauling problems. Strong and rugged, the PM-10's simple design offers durability and ease of installation for many years. Designed to fit the lead pole, the PM-10 provides solid cinching to the pole and allows for chain binding back to the pole trailer for added safety during transportation. The PM-10 has a slotted back that allows for bolting through the gain hold for added security.

## PM-10 POLE MUZZLE GENERAL SPECIFICATIONS

### PM-10 (Standard)

- ❖ Dimensions: Length 33 inches
- ❖ Weight: 58 pounds
- ❖ Pintle Eye: 3 inch I.D., 360° swivel, magnafluxed
- ❖ Chain: 1-3/8 inch snubbing chain, high tensile  
1-3/8 inch cinching chain, high tensile

**PM-10-S:** As per standard with additional snubbing chain in lieu of cinching chain.

**PM-10-W:** As per standard with non-swivel pintle eye.

**PM-10-WS:** As per standard with two snubbing chains and non-swivel pintle eye.



"Rugged Dependability."

COPYRIGHT 2015 HOGG & DAVIS, INC

