
Safety Pole Tongs





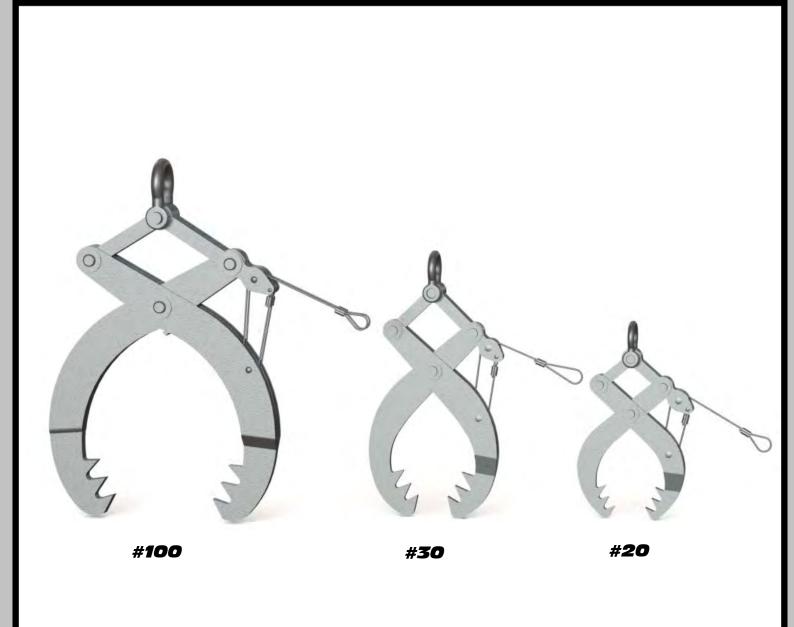

Designers and Manufacturers of Line Construction Equipment

RUGGED DEPENDABILITY

Safety Pole Tongs





Weight must be completely relieved before tongs can be released.

	Spec	ifications	
Model	20	30	100
Capacity	7,500 lbs	10,000 lbs	20,000 lbs
Opening	11 1/2 inch	16 3/4 inch	24 inches
Weight	20 lbs	30 lbs	115 lbs
Pins	7/8 inch Full Floating with welded heads	1 inch Full Floating with welded heads	1-1/4 inch full floating with welded heads
Steel	Hi-Tensile 67,000 psi		
Teeth	3 teeth on each jaw that are Flame tempered 1-1/4 inch teeth		
Pulleys	Machined Nylatron®		

Long recognized as the "Standard" in the industry, Hogg & Davis, inc. Safety Pole Tongs have proven themselves time and time again in the areas of safety, durability and economy. Timbers or poles are held securely by the heat treated, triple sawtooth designed teeth cannot slip while under load. Nylatron® pulleys ensure smooth operation of the trip line which enables the crane/hoist operator to load and unload poles without putting people in the "danger zone." Utility companies have increased their pole handling efficiences by as much as 50% with less labor. Put them to work in your company. Three sizes available to handle most sizes of poles.

Product improvements may be introduced at any time, specifications are subject to change without notice.



P.O.Box 405 3800 Eagle Loop Odell, Oregon 97044 TEL(541)354-1001 FAX(541)354-1080

Visit us at www.hoggdavis.com